


# Indicators

Blade Lantern (Flush Mount)

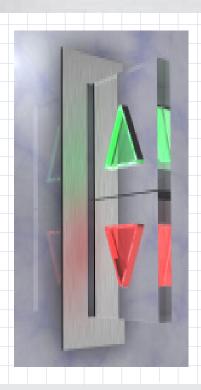

## **Blade Hall Lantern**

The Blade Hall Lantern provides a contemporary design of hall lantern, ideally suited to prestigious office and apartment buildings. The glass effect lantern creates an illuminated arrow that floats in space to identify that a lift is about to arrive.

The Blade Hall Lantern is available for both flush mount (as shown) and surface mount fixtures, with a range of arrow colours.

The unit's design looks 'custom' but this is a standard production unit that offers excellent value for money.

## **Key features**

- Provides your lift with custom appearance
- Innovative design, with arrow floating in space
- Three size options
- Meets DDA requirements
- Range of arrow colours
- Mounting options

Unit 9, Hampton Business Park

**Dewhurst UK Manufacturing Ltd** 

TW13 6DB United Kingdom

Feltham

Tel: +44(0) 20 8744 8200 +44(0) 20 8744 8299 Fax: Email: info@dewhurst.co.uk

www.dewhurst.co.uk


Publication Number: SL017/0715




## specification

Blade Lantern (Flush Mount)







Intermediate fixure with rear tamperproof fixings shown.

Terminal fixures can be supplied with a single blade or with two blades with both arrows pointing in the same direction.

This product is designed to meet the requirements of the following codes and regulations either in its standard form or through variants:

B44 ✓ (Midi/Maxi only)

EN81-71 Category 1 AS1735.12 ✓

EN81-72

A117.1 ✓ (Midi/Maxi only)

EN81-73 ✓ EN60529 IP42

For more information on our indicator range contact us at:

Dewhurst UK Manufacturing Ltd Unit 9, Hampton Business Park Feltham TW13 6DB Uinited Kingdom

Tel: +44(0) 20 8744 8200 Fax: +44(0) 20 8744 8299 Email: info@dewhurst.co.uk www.dewhurst.co.uk

Fixture Type		Fixture Dimensions					Blade Dimensions		
		А	В	С	D	E	F	G	Н
Terminal	Maxi	322	89/65	248	2.5 mm (standard) others available	151	150	75	58.5
	Midi	208		134		101	100	64	50
	Mini					76	75	40	32
Intermediate	Maxi	436		362		151	150	75	58.5
	Midi	322		248		101	100	64	50
	Mini	322				76	75	40	32

## technicals

- · Blade made from of high quality Acrylic
- Voltage: 24V d.c.
- Current: 40mA (Mini), 60mA (Midi),100mA (Maxi) @24V d.c.
- LED illumination (long life: 100,000 hours)

## benefits

- · Innovative design, enhances installation
- Wide viewing angle
- DDA compliant
- Long-life LED illumination

## options

- Three sizes available: Maxi, Midi & Mini
- Three fixing options: standard, front tamperproof, rear tamperproof
- Range of illuminated colours including red, green, blue and white
- Surface mount option available (see pictuture to right)
- Common positive or negative connection options
- Gong options available: discrete (CJ50/CJ60) or serial (CJ70)

